



M-10iD/10L (Poignet creux)



Axes	Répétabilité (mm)	Masse unité mécanique (kg)	Rayon [°]						Vitesse de mouvement[°/s]						J4 Moment/ Inertie (Nm/kgm²)	J5 Moment/ Inertie (Nm/kgm²)	J6 Moment/ Inertie (Nm/kgm²)
			J1	J2	J3	J4	J5	J6	J1	J2	J3	J4	J5	J6			
6	± 0.03*	150	340 (370)	235	455	380	280 (360) *21)	540 (900) *21)	260	240	260	430	450	720	22.0/0.65	22.0/0.65	9.8/0.17

Enveloppe de travail

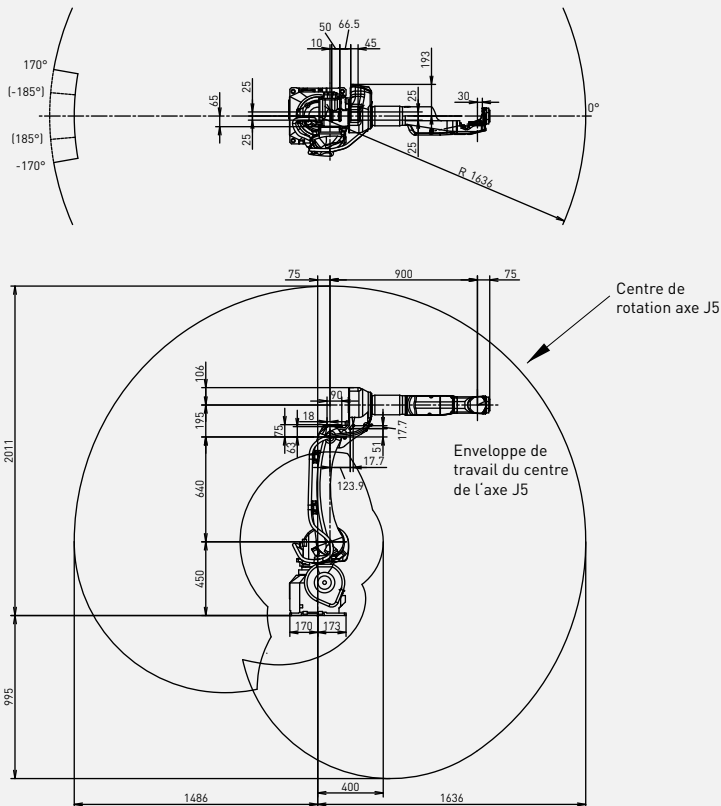

M-10*i*D/10L

343 x 343

•

•

• • • • •



R-30iB Plus

.....

○

.....

C

•

Raccordements électriques

380-575

.....

.....

Services intégrés

8/8

1

Environnement

.....
< 70

0-45

Protection

IP54 /IP55

.....
IP67

*21) Gamme étendue pour le type de câble externe

● Standard ○ Sur demande - Non disponible () avec option matériel ou logiciel