

FANUC

Experience MORE

Collaborative robots for a wide range of applications

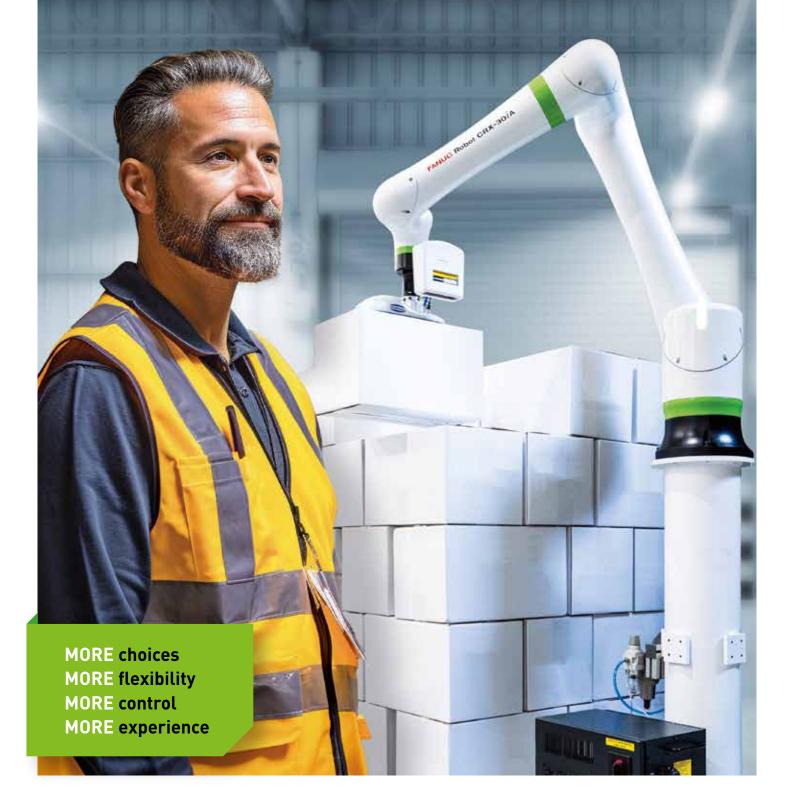

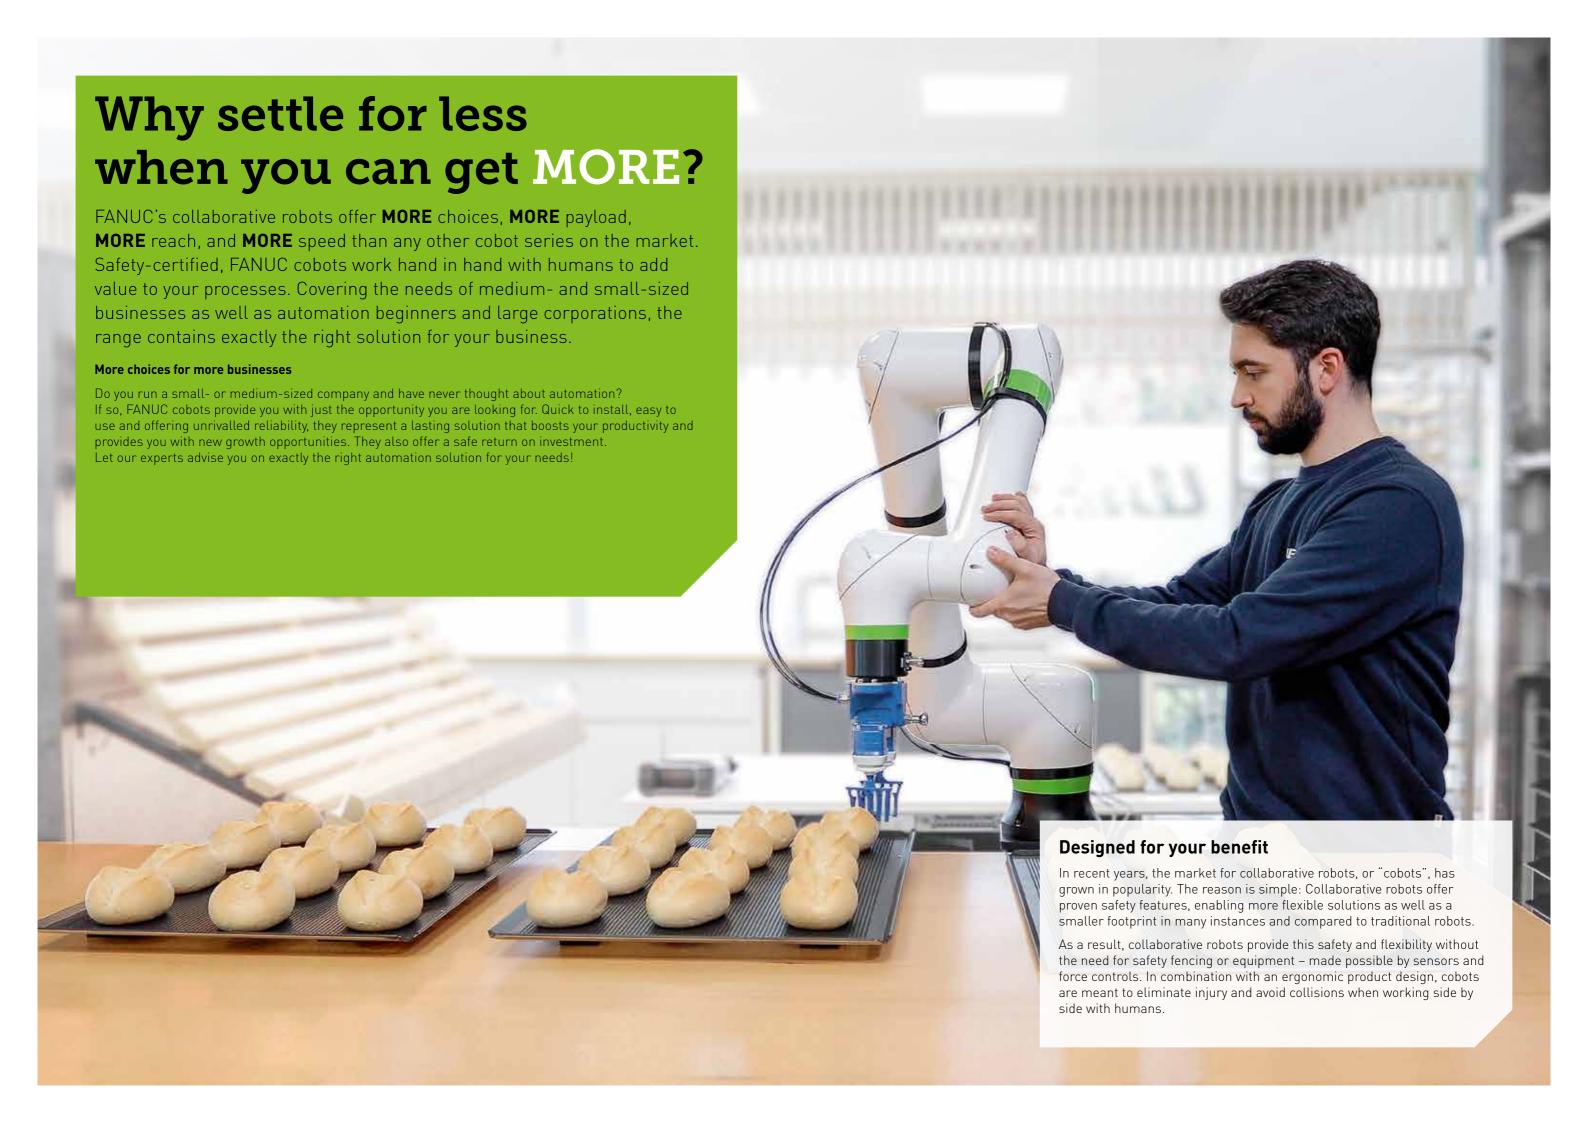

MORE performance and MORE capability

FANUC offers two series of collaborative robots: the CR series and the CRX series. No matter what series you choose, you are choosing the most reliable cobots for your automation solution, with a payload range of 5-50 kg and a reach of 994-1889 mm.




It's in our DNA

FANUC's line of cobots have a distinct heritage, displaying the same trademark intelligence and reliability that have been the backbone of our traditional yellow robots for decades!

Such proven FANUC technology includes certification according to IP67 and ISO standards, but also safety features such as our Dual Check Safety (DCS) software which helps keeping operators, cobots, and tooling completely safe.

Whether third-party connectivity or life-time support for your devices – when it comes to automation, FANUC truly is your "one stop shop" for advanced hardware and software technologies. Look no further: Benefit from working with one supplier to streamline the entire process!

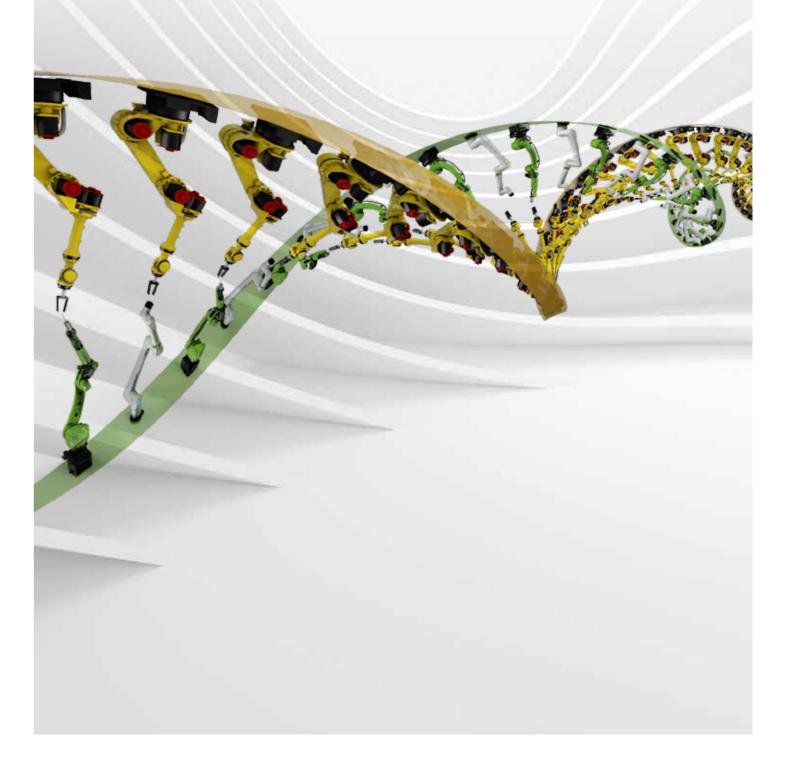

MORE collaborative opportunities with **FANUC** cobots

Key Industries



AUTOMOTIVE



LOGISTICS



PHARMACY



FOOD



TIER1



AEROSPACE



The CRX-10*i*A/L Paint offers flexible automation to more paint and coating operations, including high-mix, low-volume applications.



ASSEMBLING

Cobots are ideally suited to take over repetitive or complex assembly tasks while delivering a precise and consistent output.



GRINDING AND DEBURRING

Tasks which involve removing material can easily be carried out by cobots, adding flexibility, efficiency, and quality to the process.



HANDLING

FANUC Vision and Force accessories can quickly be connected to cobots so as to cover a variety of different handling operations.



MACHINE TENDING

When it comes to repetitive operations such as machine tending, cobots help improve your process speed and quality while at the same time keeping operators safe.



PARTS INSPECTION AND TESTING

Easy to program, FANUC cobots can carry out inspecting operations while assuring accurate production batches and product quality.



PICKING, PACKING, PALLETISING

The payloads and reaches of FANUC cobots make them suitable to a wide range of handling tasks, relieving operators from heavy



SANDING AND POLISHING

Equipping cobots with FANUC Force Sensor assures the precision and correct force needed for these kinds of operations.



SCREWING

used in screw driving applications with a tightening torque up to consistency and quality.



SEALING AND DISPENSING

FANUC cobots can be 200Nm (M16) - for higher



Dispensing tasks like gluing and sealing can be efficiently carried over by



FANUC cobots are capable of offering consistent weld quality, on top of being easy to teach and

MORE versatility and MORE precision

Key Features - CRX Series

INTEGRATION

Integration has never been easier thanks to our cobots' lightweight, slim, and compact design.

USABILITY

Ready for business in no time: the FANUC CRX series is quick to set up and exceedingly easy to program.

SERVICE

Enjoy 8 years of maintenance-free operations.

LIGHT TOUCH

By default, every CRX device is equipped with FANUC's Force Sensor – for the ultimate in tactile precision.

REPEATABILITY

Repeatability up to +/- 0.03 mm to repeat the same movement multiple times at the exact same dexterity.

SZERO MAINTENANCE

CRX-5iA

Payload: 5 kg Reach: 994 mm

CRX-10iA

Payload: 10 kg Reach: 1249 mm

CRX-10iA/L

Payload: 10 kg Reach: 1418 mm

CRX-20iA/L

Payload: 20 kg Reach: 1418 mm

CRX-30iA

Payload: 30 kg Reach: 1756 mm

Key feature - CR Series

STRONGEST COBOT ON THE MARKET

With a payload up to 50 kg, the FANUC CR-35*i*B is by far the strongest cobot on the market today. Its combination of load capacity, extensive reach, and dependable safety certification make it ideally suited for an extensive spectrum of processes involving heavy lifting and handling.



CR-35*i*B

Payload: 50 kg Reach: 1831 mm

MORE hygiene **MORE** safety for food processing

Key Features

FOOD APPLICATION SPECIALIST

Avoid the risk of contamination with NSF-H1 food grade grease. Benefit from a design with a white epoxy coating, rust/ chemical resistant plating and IP67 rating.

DUST-TIGHT AND WATERPROOF

Work in areas prone to water splashes or dampness – most standard cobots are unable to withstand wet environments without compromising safety.

LIGHT TOUCH

By default, every CRX device is equipped with FANUC's force sensing technology for the ultimate in tactile precision.

REPEATABILITY

Repeatability up to +/- 0.05 mm to repeat the same movement multiple times at the exact same dexterity.



CRX-5iA Food

Payload: 5 kg Reach: 994 mm

CRX-10iA Food

Payload: 10 kg Reach: 1249 mm

CRX-10iA/L Food


Payload: 10 kg Reach: 1418 mm

CRX-20iA/L Food

Payload: 20 kg Reach: 1418 mm

CRX-30iA Food

Payload: 30 kg Reach: 1756 mm

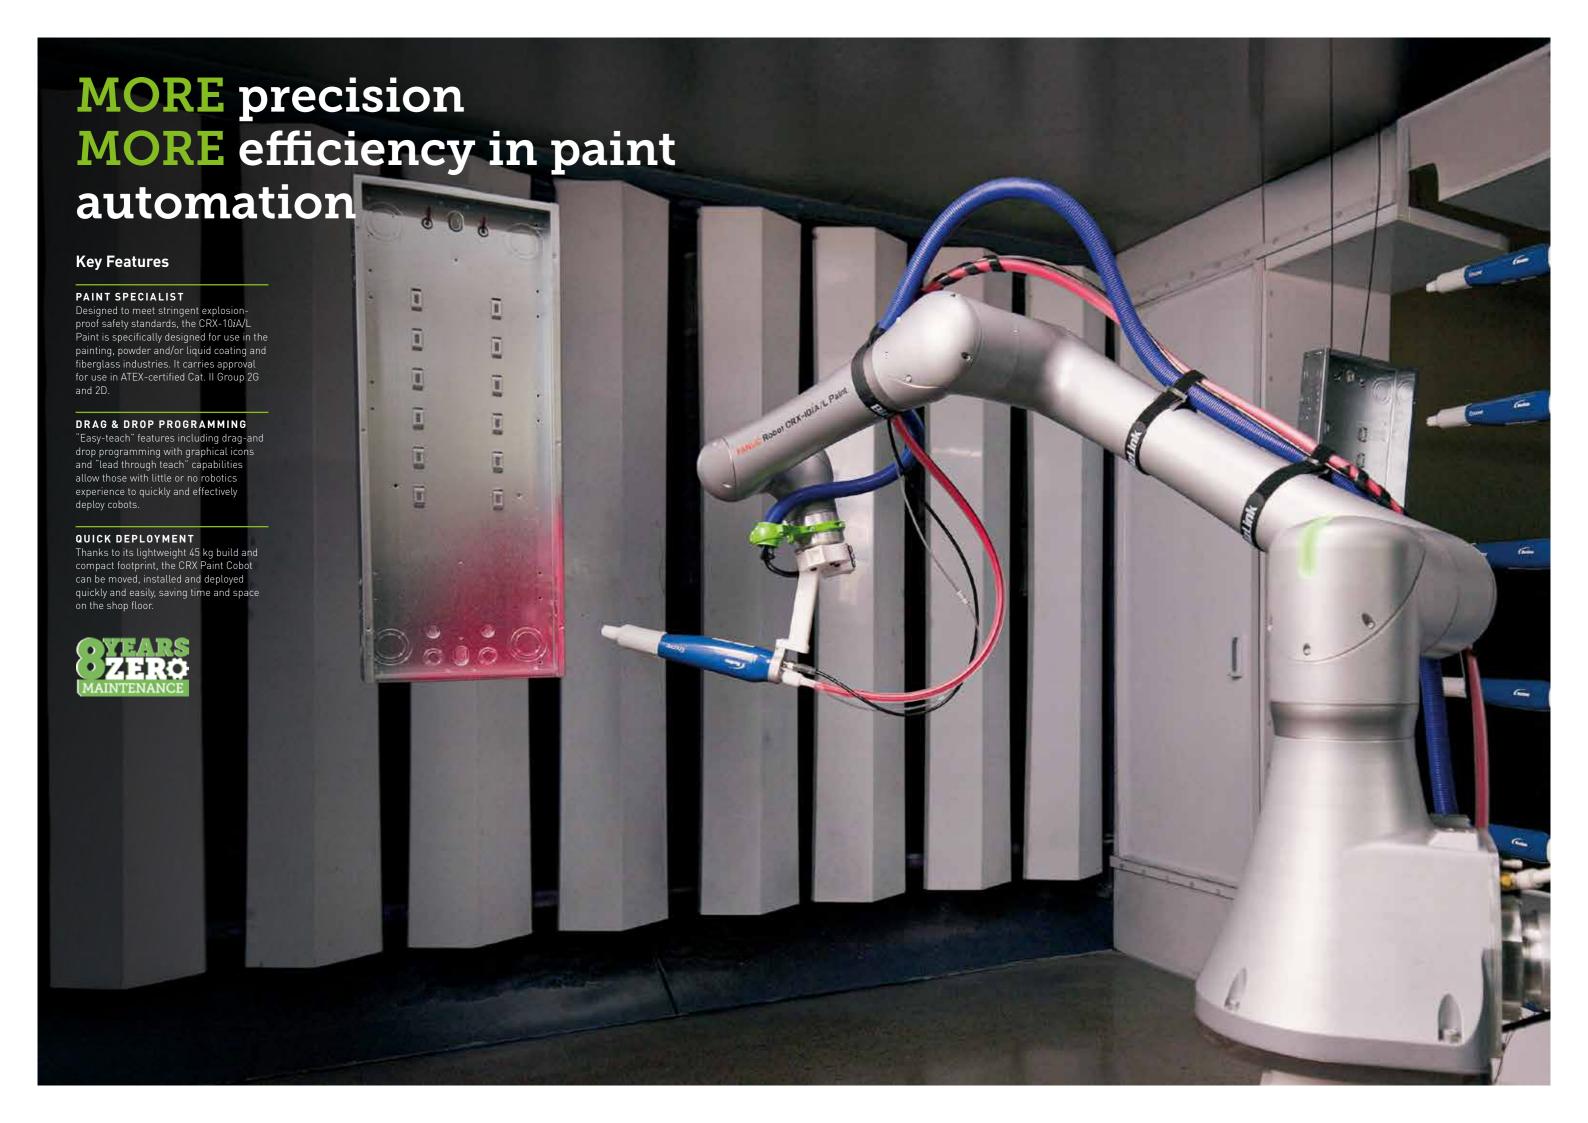

EASY programming

Whether you are a seasoned programmer or a first-time operator – FANUC cobots provide you with user-friendly and intuitive programming. Furthermore, you can also select:

Easy programming with Tablet Teach Pendant

- FANUC's Tablet Teach Pendant is designed for intuitive programming, thanks to a large touch screen. Wi-Fi connectivity comes as standard.
- Additional drag & drop functionality lets you easily program an application within minutes
- Two interfaces are available:
- · New User Interface for beginners
- · *i*Pendant User Interface for experienced operators

Easy programming with *i*HMI on *i*Pendant Touch

- FANUC's *i*HMI user interface offers ample processing power and clear high-resolution screen displays.
- Display setup, programming guides and tutorials are all readily accessible from the main home screen.
- 30 minutes that's all it takes to create a program for simple handling tasks, thanks to FANUC's programming guide.

EASY teaching without programming



You can now easily teach your FANUC collaborative robot by leading it through paths and points. Additional programmable buttons located on the J6 flange can be configured to suit individual preferences, providing unparalleled customisation and flexibility. Hand guidance is comfortable and intuitive, eliminating the need for a pendant to teach the robot positions. This will save you valuable time and money, as training costs can be kept to a minimum.

While the CRX series was designed with manual guidance in mind, the CR series was built for heavier applications, and therefore requires a separate hand guidance model.



MORE control MORE features

More than 140 software features, FANUC's latest R-30*i*B Plus controller guarantees the best processing speed and robot performance for every FANUC cobot. Designed for increased user-friendliness and minimal energy consumption, the R-30*i*B Plus comes in different cabinets to help you make the most of your floor space and production cell layouts.





Ultimate Versatility

With the CRX series you can work in palletising mode and move linear trough singularity. This gives you the flexibility to operate it as a fully-fledged palletising robot.

MORE efficiency MORE flexibility

FANUC ROBOGUIDE is an offline simulation package that simulates both the robot's motion and application commands, significantly reducing the time it takes to create new motion setups.


Advantages

FANUC ROBOGUIDE allows you to:

- Evaluate cells and cycle times without downtimes
- Save time thanks to the pre-programming feature
- Set up and test complex systems

Furthermore, ROBOGUIDE offers specific functions to be used to simulate certain applications:

- HandlingPRO Simulate and test material handling processes
- WeldPRO Simulate a robotic arc welding process
- PalletPRO Build, debug, and test a palletising application

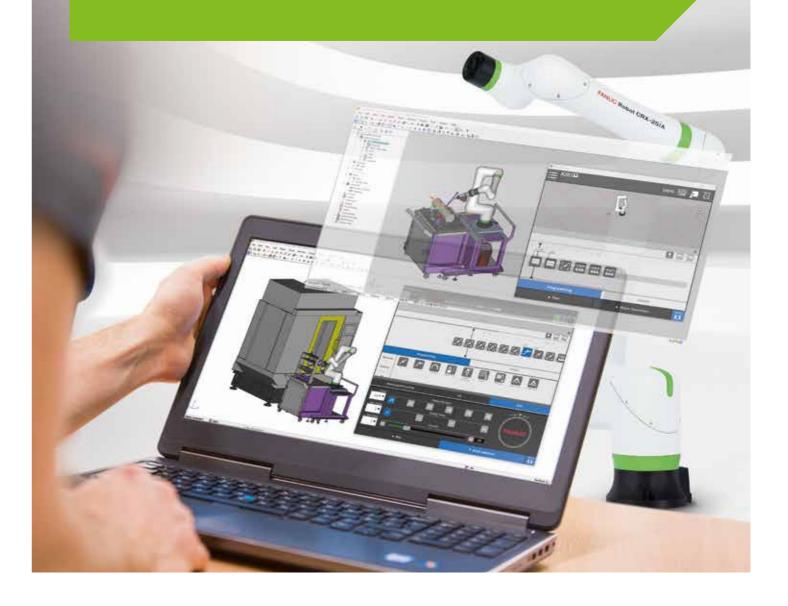



MORE information

Specifications	CRX-5 <i>i</i> A	CRX-10 <i>i</i> A	CRX-10iA/L	CRX-10 <i>i</i> A/L Paint
Type: articulated	•	•	•	•
Controlled axes	6	6	6	6
Max. load capacity at wrist [kg]	5	10	10	10
Reach [mm]	994	1249	1418	1418
Repeatability [mm] *8]	± 0.03	±0.04	±0.04	±0.04
Mass [kg]	25	40	40	47
Installation: floor upside down wall	• • •	• • •	• • •	• • •
Motion range				
J1 axis rotation [°]	400	380	360	360
J2 axis rotation [°]	360	360	360	360
J3 axis rotation [°]	635	570	540	540
J4 axis wrist rotation [°]	380	380	380	380
J5 axis wrist swing [°]	360	360	360	360
J6 axis wrist rotation [°]	450	450	450	450
Max. speed [mm / s]*2]	1000* ^{1]}	1000*1)	1000*1)	1000*1)
Allowable load moment at wrist				
J4 axis [Nm]	19.0	34.8	34.8	34.8
J5 axis [Nm]	15.4	26.0	26.0	26.0
J6 axis [Nm]	6.7	11.0	11.0	11.0
Allowable load inertia at wrist				
J4 axis [kgm²]	0.77	1.28	1.28	1.28
J5 axis [kgm²]	0.50	0.90	0.90	0.90
J6 axis [kgm²]	0.10	0.30	0.30	0.30
Installation environment				
Acoustic noise level [dB]	<70	<70	<70	<70
Ambient operating temperature [°C]	0-45	0–45	0-45	0-45
Protection				
Body standard/optional	IP67	IP67	IP67	IP67
Wrist & J3 arm standard/optional	IP67	IP67	IP67	IP67
Cleanroom class	• (ISO Class 4)* ³⁾	• (ISO Class 2)*3)	• (ISO Class 3)*3)	-
Food grade / mechanical options				
Food grade grease	• *4]	• *4]	◆ *4]	-
White epoxy paint	•	•	•	-

•	standard

^{*1) 2000}mm/s in high speed mode

Specifications	CRX-20 <i>i</i> A/L	CRX-30 <i>i</i> A	CR-35 <i>i</i> B
Type: articulated	•	•	•
Controlled axes	6	6	6
Max. load capacity at wrist [kg]	20	30 (25) *5 ⁾	35/50
Reach [mm]	1418	1756 (1889)* ⁵⁾	1831 (1643)
Repeatability [mm] *8)	±0.04	± 0.05	±0.03
Mass [kg]	41	135	386
nstallation: floor upside down wall	• • •	• • •	• - -
fotion range			
1 axis rotation [°]	360	360	370
2 axis rotation [°]	360	360	215
3 axis rotation [°]	540	540	338
l4 axis wrist rotation [°]	380	380	400
l5 axis wrist swing [°]	360	360	280
6 axis wrist rotation [°]	450	450	900
Max. speed [mm / s] *2]	1000	1000 *1 ⁾	750* ⁶⁾
Allowable load moment at wrist			
4 axis [Nm]	70.0	115.0 (100.0) * ⁵⁾	110.0* ^{7]}
5 axis [Nm]	64.0	85.0	110.0 ^{*7]}
6 axis [Nm]	30.0	32.0	60.0* ⁷⁾
llowable load inertia at wrist			
4 axis [kgm²]	4.00	4.70	4.00 (10.80) * ⁷⁾
5 axis [kgm²]	4.00	4.00	4.00 (10.80) * ^{7]}
6 axis [kgm²]	2.00	2.00	1.5 (4.40) * ⁷⁾
nstallation environment			
Acoustic noise level [dB]	<70	<70	< 70
Ambient operating temperature [°C]	0–45	0–45	0–45
Protection			
Body standard/optional	IP67	IP67	IP54
Vrist & J3 arm standard/optional	IP67	IP67	IP67
Cleanroom class	• (ISO Class 3)*3)	• (ISO Class 2)* ³⁾	-
Food grade / mechanical options			
Food grade grease	•*4]	•*4]	-
White epoxy paint	•	•	-

^{*2)} During short distance motions, the speed may not reach the maximum value stated

^{*3)} Not with food grade option

^{*4)} Food grade grease for all axes

^{*5)} In case of 25 kg payload
*6) It is necessary to set a motion speed according to risk assessment of system considering pinching with the surroundings.

^{*7)} In case of 50 kg payload *8) Based on ISO9283

MORE confidence

With FANUC, you benefit from efficient FANUC service worldwide. Wherever you need us, our comprehensive FANUC network provides sales, support and customer service all around the world. That way, you can be sure you have always got a local contact that speaks your language.









Lifetime OEM spare parts

As long as your machine is in service we are able to provide you with original spare parts.



Efficient training

The FANUC Academy offers everything you need to upskill your teams and increase productivity – from introductory programs for beginners to courses tailored to the needs of expert users and specific applications.



One common servo and control platform Infinite opportunities THAT's FANUC!



FΑ

CNCs, Drives, Accessories and Software **ROBOTS**

Industrial and Collaborative Robots, Accessories and Software **ROBOCUT**

CNC Wire-Cut Electric Discharge Machines ROBODRILL

Compact CNC Machining Centres **ROBOSHOT**

Electric CNC Injection Moulding Machines IoT

Industry 4.0 solutions