

# Strong, compact and versatile

## SCARA ROBOT SR-20iA



**STRONG ARM**  
20 kg max payload



**INTEGRATED SERVICES**  
I/O, 24VDC, solenoid valves and air lines standard on board

**BRAKE RELEASE SWITCH**  
allows easy error recovery



**SMART AND CLEAN DESIGN**  
internal cable/pipe routing  
minimise interference area



**ULTRACOMPACT FOOTPRINT  
AND ROBOT DESIGN**  
simplifies the integration



### Next level FANUC SCARA robot line-up

- high payload capacity of 20 kg - horizontal reach: 1100 mm - vertical reach: 450 mm
- ultra-compact footprint and clean robot design minimises interference with peripheral devices
- wrist inertia of 0.45 kgm<sup>2</sup> and pushdown force of 250N support assembly, packaging and material handling operations, also with larger grippers
- R-30iB Compact Plus controller with minimum space requirements
- integrated services e.g. I/O, 24VDC, solenoid valves and air lines in the arm reduce costs and simplify integration
- optional epoxy white IP65 version (Cleanliness class ISO coming soon)
- bottom cable exit and wall mounting equipment optional available
- web browser independent user interface iRProgrammer for intuitive programming and ease-of-use via tablet or PC (safari, chrome, IE, etc.)
- iPendant Touch optional supported

# SR-20iA




Max. load capacity  
at wrist: **20 kg**



Max. reach:  
**1100 mm**

Controlled axes	Repeatability (mm)	Mechanical weight (kg)	Motion range (°)						Maximum speed (°/s)						J4 Inertia (kgm²)	J5 Inertia (kgm²)	J6 Inertia (kgm²)
			J1	J2	J3	J4	J5	J6	J1	J2	J3	J4	J5	J6			
4	±0.02 (J1,J2), ±0.01 (J3), ±0.005° (J4)	64	290	290	450/ 300mm*	1440	-	-	440	500	2800 mm/sec	1700	-	-	0.45	-	-

## Working range

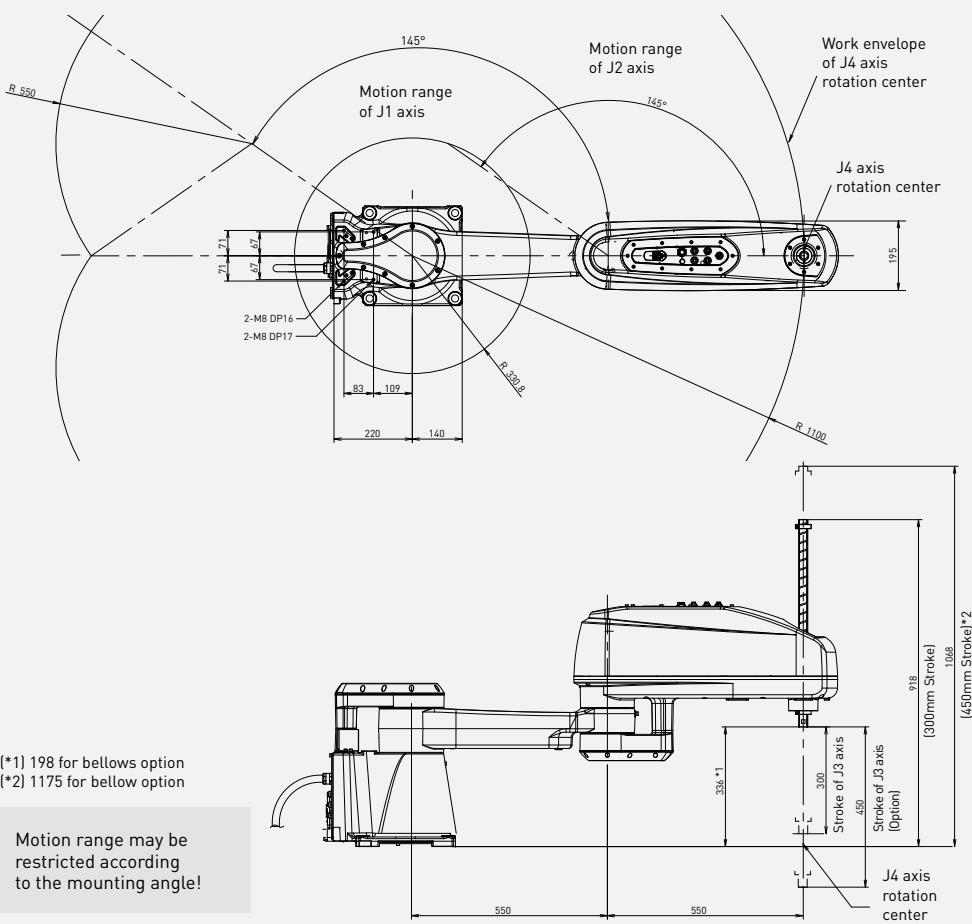

### Robot

Robot footprint [mm]	280 x 360 (497)
Mounting position Floor	●
Mounting position Ceiling	-
Mounting position Angle	-
Mounting position Wall	○



### Controller

Compact Plus	-
Open air cabinet	-
Mate cabinet	-
A-cabinet	-
B-cabinet	-
iPendant Touch	○

### SR-20iA

### Electrical connections

Voltage 50/60Hz 3phase [V]	-
Voltage 50/60Hz 1phase [V]	200-230
Average power consumption [kW]	0.45

### Integrated services

Integrated signals on upper arm In/Out	4 RI
Integrated air supply	1 x 6mm
Integrated solenoid valve	2 valves (4 RO)

### Environment

Acoustic noise level [dB]	<70
Ambient temperature [° C]	0-45

### Protection

Body standard/optional	IP20 \ IP65 *
Wrist & J3 arm standard/optional	IP20 \ IP65 *

### Auxiliary

Max. push-down force (Newton)	250
Max. linear speed at TCP (mm/sec)	3000
Cleanliness class	(tbd.)

● standard   ○ on request   - not available   ( ) with hardware and/or software option   \* optional